Final Environmental Assessment for Phase II Air Cargo Facility Development

Volume 2: Appendix C

Lakeland Linder International Airport Polk County, Florida

October 2021

APPENDIX C Air Quality Documentation

Appendix C.1 Air Monitoring Data Summary

Appendix C.2 Air Quality Technical Report

APPENDIX C.1 Air Monitoring Data Summary

				Concentration						
Pollutant	Averaging	Level	Form	(Monitor ID, Distance from LAL)						
	Time			12-105-6006 3.2 Miles	12-105-6005 3.3 Miles	12-057-3002 12 Miles	12-057-1073 21 Miles	12-057-0113 26 Miles		
Carbon	8-hour	9 ppm	Not to be exceeded					Not Exceeded		
monoxide [76 FR 54294, Aug 31, 2011]	1-hour	35 ppm	more than once per year					Not Exceeded		
Lead [81 FR 71906, October 18, 2016]	Rolling 3 month average	0.15 µg/m³	Not to be exceeded				Not Exceeded			
Nitrogen dioxide [75 FR 6474, Feb 9, 2010]	1-hour	100 ppb	98th percentile of 1- hour daily maximum concentrations, averaged over 3 years					37.000		
[77 FR 20218, April 3, 2012]	Annual	53 ppb	Annual mean					9.013		
Ozone [80 FR 65292, Oct 26, 2015]	8-hour	0.070 ppm	Annual fourth-highest daily maximum 8- hour concentration, averaged over 3 years	0.068	0.0677	0.066				
	PM _{2.5} Annual (primary)	12 µg/m³	Annual mean, averaged over 3 years	7.665		8.291		8.359		
Particle Pollution	PM _{2.5} Annual (secondary)	15 µg/m³	Annual mean, averaged over 3 years	1.000		0.201		0.000		
[78 FR 3085, Jan 15, 2013]	PM _{2.5} 24-hour	35 µg/m³	98th percentile, averaged over 3 years	15.067		18.867		21.100		
	PM₁₀ 24-hour	150 µg/m³	Not to be exceeded more than once per year on average over 3 years			Not Exceeded				
Sulfur dioxide	1-hour	75 ppb	99th percentile of 1- hour daily maximum		22.267	9.000				

Air Monitoring Data Summary (2017-2019)

				Concentration (Monitor ID, Distance from LAL)						
Pollutant	Averaging	Laval	E a mar							
Foliulani	Time	Level	Form	12-105-6006	12-105-6005	12-057-3002	12-057-1073	12-057-0113		
				3.2 Miles	3.3 Miles	12 Miles	21 Miles	26 Miles		
[77 FR 20218,			concentrations,							
April 3, 2012]			averaged over 3 years							
[75 FR 35520,			Not to be exceeded							
Jun 22, 2010]	3-hour	0.5 ppm	more than once per		Not Exceeded	Not Exceeded				
			year							

-- = not monitored; FR = Federal Register; ppb = parts per billion; ppm = parts per million; $\mu g/m^3$ = micrograms per cubic meter of air Sources: FR, as above; and EPA AirData (https://www.epa.gov/outdoor-air-quality-data), accessed January 28, 2020

APPENDIX C.2 Air Quality Technical Report

Phase II Air Cargo Facility Development at Lakeland Linder International Airport (LAL) Environmental Assessment

Air Quality Technical Report

Prepared for:

City of Lakeland, Florida and Federal Aviation Administration

Prepared by:

AECOM

September 2021

TABLE OF CONTENTS

Section

СНАРТЕ	R 1 INTRODUCTION	1-1
1.1.	Analysis Methodology	1-1
1.1.1.	Construction Emissions	1-1
1.1.2.	Operational Emissions	1-7

LIST OF TABLES

Table 1.1-1 Estimated Annual Construction Activity	2
Table 1.1-2a Off-Road Equipment Emissions Rates	5
Table 1.1-2b On-Road Vehicle Emissions Rates	6
Table 1.1-3a 2019 Aircraft Fleet Mix and Activity	9
Table 1.1-3b 2022 Aircraft Fleet Mix and Activity	11
Table 1.1-3c 2027 Aircraft Fleet Mix and Activity	14
Figure 1.1-1 Roadway Segments Included in Air Quality Analysis	17
Table 1.1-4 Estimated Annual Motor Vehicle Operations Activity	18
Table 1.1-5 On-road Vehicle Emission Rates	18
Table 1.1-6 On-road Vehicle Idling Emission Rates	19

LIST OF FIGURES

Figure 1.1-1 Roadway Segments	Included in Air Quality Analysis	1-17
-------------------------------	----------------------------------	------

Page

ACRONYMS AND ABBREVIATIONS

Airport Construction Emissions Inventory Tool Aviation Environmental Design Tool Auxiliary Power Unit Annual Vehicle Miles of Travel
Best Management Practice
Carbon Monoxide Carbon Dioxide Equivalent
Environmental Assessment Emissions Rate U.S. Environmental Protection Agency
Greenhouse Gas Ground Support Equipment
Horsepower
Interstate 4
Lakeland Linder International Airport
Motor Vehicle Emissions Simulator miles-per-hour
Nitrogen Oxides
Particulate Matter Particulate Matter equal to or less than 2.5 micrometers in diameter Particulate Matter equal to or less than 10 micrometers in diameter
Sulfur Dioxide Socioeconomic Study Area
Touch and Go Tons Per Year Total Suspended Particulate
Volatile Organic Compounds

CHAPTER 1 INTRODUCTION

This *Air Quality Technical Report* details the assessment scope, calculation methodology, input data and other technical information used in the analysis of air quality impacts associated with Environmental Assessment (EA) for the proposed Phase II Air Cargo Facility Development at the Lakeland Linder International Airport (i.e., LAL, or the Airport), hereinafter referred to as the Proposed Project.

1.1. ANALYSIS METHODOLOGY

1.1.1. CONSTRUCTION EMISSIONS

Construction period emission inventories of the following criteria pollutants and their precursors were prepared for the Proposed Project: carbon monoxide (CO), nitrogen oxides (NO_x), sulfur dioxide (SO₂), particulate matter (PM), and volatile organic compounds (VOC). Greenhouse gas (GHG) emissions, expressed in metric tons of carbon dioxide equivalent (CO₂e) emissions, were also computed. The inventories include annual emissions from the following construction emissions sources: off-road equipment, on-road vehicles, and fugitive sources including asphalt paving and dust generation from site-wide construction activities. Off-road equipment and on-road vehicle emissions were computed using **Equations 1** and **2**, respectively.

Annual hours of off-road equipment operation and on-road annual vehicle miles of travel (AVMT) were derived using an engineering estimate of probable materials quantities and construction cost developed for the proposed expanded air cargo sort building, air cargo aircraft ramp, ground support equipment (GSE) ramp, taxilane, employee parking, truck yard, and stormwater retention pond. This information was input to the Airport Cooperative Research Program Airport Construction Emissions Inventory Tool (ACEIT), which then estimates the number and types of equipment to be used on the project and the deployment schedule (monthly and annually). Annual construction equipment and vehicle activity is summarized on **Table 1.1-1**.

Equation 1:

$$\mathsf{Emissions}_{(\mathsf{tpy})} = \sum_{\mathsf{v}=\mathsf{i}}^{\mathsf{n}} \mathsf{EF}_{\mathsf{v}} \times \mathsf{HP}_{\mathsf{v}} \times \frac{\mathsf{hours}}{\mathsf{day}} \times \frac{\mathsf{days}}{\mathsf{year}} \div 2,000 \div 453.59$$

Where:

 $\begin{array}{l} {\sf Emissions}_{(tpy)}{\sf = annual\ emissions\ (tons\ per\ year)} \\ {\sf EF}_v{\sf = emissions\ rate\ for\ equipment\ v(i)...v(n)\ (grams\ per\ horsepower-hour\ of\ operation)} \\ {\sf HP}_v{\sf = rated\ horsepower\ for\ equipment\ v(i)...v(n)} \\ {\sf 2,000\ =\ pounds\ per\ ton} \\ {\sf 453.59\ =\ grams\ per\ pound} \end{array}$

Equation 2:

$$\mathsf{Emissions}_{(\mathsf{tpy})} = \sum_{v=i}^{n} \mathsf{EF}_{v} \times \frac{\mathsf{miles}}{\mathsf{day}} \times \frac{\mathsf{days}}{\mathsf{year}} \div 2,000 \div 453.59$$

Where:Emissions(tpy)= annual emissions (tons per year)EFv = emissions rate for vehicle v(i)...v(n) (grams per mile)2,000 = pounds per ton453.59 = grams per pound

Table 1.1-1 Estimated Annual Construction Activity
--

Off-road Equipment	Fuel	Annual Operating Hours
40 Ton Rough Terrain	Diesel	321.6
40 Ton Rough Terrain Crane	Diesel	240.0
90 Ton Crane	Diesel	960.0
90 Ton Crane Supplemental Hoisting	Diesel	240.0
Air Compressor	Gasoline	229.1
Asphalt Paver	Diesel	259.9
Backhoe	Diesel	4,120.2
Caisson Drilling Rig	Gasoline	400.0
Chain Saw	Gasoline	281.2
Chipper/Stump Grinder	Diesel	281.2
Concrete Boom Pump	Gasoline	720.0
Concrete Pump	Gasoline	324.0
Concrete Ready Mix Trucks	Gasoline	1,800.0
Concrete Saws	Gasoline	194.8
Concrete Truck	Diesel	2,095.8
Concrete Truck Pump	Gasoline	1,140.0
Crane	Diesel	30.0
Curb/Gutter Paver	Diesel	32.9
Distributing Tanker	Diesel	129.4
Dozer	Diesel	3,500.8
Dump Truck	Diesel	1,196.9
Dump Truck (12 cy)	Diesel	5,720.5
Excavator	Diesel	1,791.7
Flatbed Truck	Diesel	1,673.2
Fork Truck	Diesel	7,502.5
Forklift	Diesel	2,372.4
Front Loader	Diesel	556.8
Front Loader for Subgrade Materials	Diesel	158.4
Generator	Gasoline	240.0
Grader	Diesel	86.8
Grout Mixer	Gasoline	1,600.0
Grout Wheel Truck	Diesel	240.0
High Lift	Diesel	3,361.6
Hydroseeder	Gasoline	460.3
Loader	Diesel	318.2
Man Lift	Diesel	6,400.0

Off-road Equipment	Fuel	Annual Operating Hours
Man Lift (Fascia Construction)	Diesel	40.0
Material Deliveries	Diesel	120.0
Off-Road Truck	Diesel	81.8
Other General Equipment	Gasoline	3,102.5
Pickup Truck	Diesel	5,972.2
Pile Driver	Gasoline	160.0
Pumps	Gasoline	93.7
Roller	Diesel	2,908.8
Rubber Tired Loader	Diesel	194.8
Scraper	Diesel	1,451.8
Skid Steer Loader	Diesel	392.5
Slip Form Paver	Diesel	194.8
Surfacing Equipment (Grooving)	Gasoline	324.7
Survey Crew Trucks	Diesel	39.2
Ten Wheelers- Material Delivery	Diesel	120.0
Tool Truck	Diesel	7,843.2
Tower Crane	Diesel	1,960.0
Tractor Trailer- Material Delivery	Diesel	8,600.4
Tractor Trailer- Steel Deliveries	Diesel	480.0
Tractor Trailer- Stone Delivery	Diesel	398.4
Tractor Trailer with Boom Hoist- Curbs Del & Place	Diesel	81.6
Tractor Trailers- Rebar Deliveries	Diesel	760.0
Tractor Trailers Temp Fac.	Diesel	17.6
Tractors/Loader/Backhoe	Diesel	511.6
Trencher	Diesel	240.0
Trencher for U/G Piping	Diesel	398.4
Trenchers	Diesel	34.3
Trowel Machine	Gasoline	760.0
Trowel Machines (4) machines	Gasoline	480.0
Truck for Topsoil & Seed Del&Spread	Diesel	81.6
Vibratory Compactor	Gasoline	633.5
Water Truck	Diesel	1,800.0

Source: ACEIT, 2020

Because construction equipment and vehicle emissions rates contained in ACEIT are not sufficiently representative of local conditions, equipment and vehicle emissions rates were instead generated using the current version of the U.S. Environmental Protection Agency Motor Vehicle Emissions Simulator (EPA MOVES2014b). MOVES2014b was invoked at the project-level using input databases specific to Polk County, Florida. Input databases were adapted from EPA's most recent National Emissions Inventory, which incorporates Polk County-specific information to the extent it was submitted to the EPA by state and local air quality and transportation agencies.

Vehicle age distributions, inspection and maintenance programs (to the extent applied), fuel supply and other data were held constant for future years; that is, projections or adjustments were not applied unless available from locally-developed data. A summer design hour representative of a July weekday in Polk County from 1600 to 1700 was selected for emissions rate modeling based on the worst-case temperature/humidity hourly condition, according to the MOVES

'ZoneMonthHour' input database. Emissions rates for on-road vehicles were generated for five mile-per-hour (mph) increments ranging from 5 to 65 mph. For the purposes of emissions calculations, it was assumed that all on-road vehicles would travel at an average speed of 35 miles per hour. **Tables 1.1-2a** and **1.1-2b** specify the annual off-road equipment and on-road vehicle emissions rates applied in the analysis.

Equation 3 was used to estimate dust emissions from site-wide construction activities, adapted from EPA's AP-42 methodology.¹ EPA studies have concluded that ten percent of the dust emissions in the PM_{10} or less size fractions are $PM_{2.5}$.² Therefore, uncontrolled PM_{10} dust emissions were factored by 0.10 to derive the $PM_{2.5}$ component. Further, dust suppression and erosion control Best Management Practices (BMPs) during construction, such as site watering and track-out prevention measures, will ensure that PM impacts from construction activities are minimized. According to EPA, adherence to these BMPs can result in a dust control efficiency of 75 percent, which was applied to the calculation to represent controlled PM emissions.³

Estimation of annual evaporative VOC emissions from asphalt curing is based upon the EPA methods outlined in AP-42⁴ as well as the Emissions Inventory Improvement Program.⁵ Equation **4** outlines this method. Because the asphalt characterization is not known, assuming that 35 percent of liquefied asphalt is diluent that can evaporate as VOC, 95 percent of this diluent would evaporate during asphalt curing, and that the density of the diluent is 1.98 pounds per liter of diluent applied.

¹ U.S. Environmental Protection Agency. *Compilation of Air Pollutant Emissions Factors (AP-42). Fifth Edition, Volume I Chapter 13: Miscellaneous Sources.* 1995.

² Pace, Thompson G. *Examination of the Multiplier Used to Estimate PM2.5 Fugitive Dust Emissions From PM10.* Presented at the Environmental Protection Agency 14th International Emission Inventory Conference. Las Vegas, NV, 2005

³ U.S. Environmental Protection Agency. *Fugitive Dust Background Document and Technical Information Document for Best Available Control Measures*. OAQPS, EPA-450/2-92-004. 1992.

⁴ U.S. Environmental Protection Agency. *Compilation of Air Pollutant Emission Factors (AP-42). Fifth Edition Volume I Chapter 4.5: Asphalt Paving Operations*. 1995.

⁵ U.S. Environmental Protection Agency. *Emissions Inventory Improvement Program (EIIP), Volume III: Chapter 17, "Asphalt Paving".* 2001.

Table 1.1-2a Off-Road Equipment Emissions Rates

Equipmont	Fuel	Lood	Horoopower	Emissi	on Rate	(grams pe	r horsepo	wer-hour	at operat	ing load)
Equipment	Туре	Load	Horsepower	CO	NOx	PM ₁₀	PM _{2.5}	SO ₂	VOC	CO ₂ e
Cranes	Diesel	0.43	237.70	0.181	0.788	0.034	0.033	0.004	0.050	530.991
Air Compressors	Gasoline	0.56	5.19	208.961	2.116	0.378	0.348	0.007	9.954	1,247.391
Pavers	Diesel	0.59	134.60	0.274	1.028	0.068	0.066	0.004	0.044	536.789
Tractors/Loaders/Backhoes	Diesel	0.21	87.17	3.079	3.233	0.518	0.502	0.005	0.593	694.627
Bore/Drill Rigs	Gasoline	0.79	2.21	205.168	1.984	0.318	0.293	0.007	9.606	1,247.879
Chain Saws < 6 HP (com)	Gasoline	0.7	3.92	266.029	1.528	9.748	8.968	0.004	73.339	710.950
Chippers/Stump Grinders (com)	Diesel	0.43	84.47	1.756	3.637	0.319	0.310	0.005	0.350	589.629
Pumps	Gasoline	0.69	4.63	207.004	2.048	0.347	0.320	0.007	10.529	1,247.644
Cement & Mortar Mixers	Gasoline	0.59	8.37	275.340	1.688	0.109	0.100	0.006	9.774	1,061.043
Concrete/Industrial Saws	Gasoline	0.78	4.53	266.029	1.528	9.748	8.968	0.004	63.532	710.949
Off-highway Trucks	Diesel	0.59	419.90	0.142	0.376	0.027	0.026	0.004	0.024	536.802
Crawler Tractor/Dozers	Diesel	0.59	136.10	0.211	0.801	0.053	0.052	0.004	0.032	536.802
Excavators	Diesel	0.59	137.60	0.175	0.589	0.045	0.043	0.004	0.026	536.805
Forklifts	Diesel	0.59	85.48	0.158	0.948	0.029	0.029	0.004	0.014	596.142
Generator Sets	Gasoline	0.68	8.82	275.368	1.634	0.113	0.104	0.006	8.503	1,060.742
Graders	Diesel	0.59	231.20	0.162	0.493	0.032	0.031	0.004	0.030	536.802
Aerial Lifts	Diesel	0.21	60.46	3.613	4.546	0.488	0.473	0.005	0.761	694.387
Commercial Turf Equipment (com)	Gasoline	0.6	5.22	205.057	1.981	0.316	0.291	0.007	7.604	1,247.892
Other General Industrial Eqp	Gasoline	0.54	4.29	211.553	2.207	0.420	0.386	0.007	10.070	1,247.056
Rollers	Diesel	0.59	84.76	0.806	1.697	0.134	0.130	0.004	0.067	596.082
Rubber Tire Loaders	Diesel	0.59	136.30	0.304	1.118	0.075	0.073	0.004	0.051	536.778
Scrapers	Diesel	0.59	422.50	0.335	0.918	0.051	0.049	0.004	0.048	536.780
Skid Steer Loaders	Diesel	0.21	57.67	4.328	4.811	0.720	0.698	0.006	0.946	693.699
Surfacing Equipment	Gasoline	0.49	8.92	278.743	1.694	0.124	0.114	0.006	6.560	1,060.494
Trenchers	Diesel	0.59	61.02	0.922	2.979	0.120	0.116	0.004	0.146	596.005
Plate Compactors	Gasoline	0.55	4.41	205.471	1.995	0.323	0.297	0.007	8.704	1,247.840

Source: EPA MOVES2014b

	Fuel	Emission Rate (grams per vehicle mile traveled)							
Vehicle Type	Туре	СО	NOx	PM10	PM _{2.5}	SO ₂	VOC	CO ₂ e	
Light commercial truck	Diesel	3.055	1.032	0.088	0.044	0.005	0.171	620.833	
Single unit short-haul truck	Diesel	1.679	3.477	0.404	0.250	0.010	0.512	1,174.359	
Passenger car	Gasoline	3.698	0.183	0.044	0.009	0.006	0.165	327.538	
Passenger truck	Gasoline	6.649	0.461	0.049	0.011	0.009	0.269	447.292	

Table 1.1-2b On-Road Vehicle Emissions Rates

Source: EPA MOVES2014b

Equation 3:**

$$PM_{10(tpy)} = EF_{TSP} \times \frac{days}{year} \times \frac{acres}{day} \times 0.45 \div 2,000$$

Where:

PM_{10(tpy)}= annual PM₁₀ dust emissions (tons per year) EF_{TSP}= total suspended particulate (TSP) emissions rate (80 pounds per acre-day) 0.45 = estimated ratio of PM₁₀ to TSP 2,000 = pounds per ton **Represents uncontrolled emissions of PM₁₀. Controlled emissions are derived by applying a 75% control factor.

 $PM_{2.5} = PM_{10} \times 0.10$

Equation 4:

 $VOC_{(tpv)} = A \times AR \times VD \times EF \times D \div 2,000$

Where:VOC_(tpy)= annual VOC paving emissions (tons per year)A = area of pavement in square meters(m^2)AR = asphalt application rate (0.679 liter/ m^2)VD = volume fraction of diluent (0.35)AF = mass fraction of diluent which evaporates as VOC (0.95)D = solvent density (1.98 pounds/liter)2,000 = pounds per ton

1.1.2. OPERATIONAL EMISSIONS

Operations of aircraft (Boeing 767-300 and 737-800), aircraft Auxiliary Power Unit (APU), and Ground Support Equipment (GSE), would change as a result of the expanded air cargo facilities described by the EA Proposed Project. Additionally, an increase in truck traffic and employee commute trips would result from increased cargo handling activities. Operations of stationary combustion sources and on-airport motor vehicles would not be expected to increase substantially as a result of the Proposed Project. Therefore, operational emissions estimates for the future year conditions in the EA with the Proposed Project Alternatives, include emissions from aircraft, APUs, GSE, cargo truck traffic, and air cargo facility employee vehicles. Emissions from aircraft, APUs, and GSE were estimated using Federal Aviation Administration's Aviation Environmental Design Tool (AEDT). Air emission analyses for airports are required to use AEDT for these sources. Emissions from cargo trucks and employee commutes were estimated using **Equation 2**, using emission rates obtained from MOVES.

Noise modeling performed for the EA using AEDT was used as a basis for the air quality analysis. The noise modeling accounted for air cargo aircraft operations derived from the expected rates of use at the cargo facility under the No-Action and Proposed Project Alternatives. APU and GSE operations were derived using default values for the Boeing 767 and Boeing 737 in AEDT.

Criteria pollutant emission rates for air cargo aircraft, APUs, and associated GSE are built into AEDT, using Boeing 767 aircraft with the GE 2GE054 engine and Boeing 737 with the CFM International 4CM039 engine (representative of proponent in-use aircraft fleet), and using default rates for APU and GSE. The aircraft fleet mix, associated engines, and number of operations used to develop the operations emissions inventory are provided in **Tables 1.1-3a** through **1.1-3c**.

Default GHG emission rates for air cargo aircraft are built into AEDT and were used for this analysis. GHG emissions from APUs and GSE are not built into AEDT. GHG emissions from these sources were calculated using AEDT default operating times and fuel flow rates for specific equipment, pounds per gallon for each assigned fuel type, and the GHG emission rate per gallon of each fuel. Fuel based emission rates applied to the AEDT-derived fuel consumption for GSE and APU correspond to 21.095 pounds/gallon for CO₂, 0.000595248 pounds/gallon for CH₄ and 0.000683433 pounds/gallon for N₂O for Jet A; 22.5091702 pounds/gallon for CO₂, 0.001256633 pounds/gallon for CH₄ and 0.000573201 pounds/gallon for N₂O for diesel; and 19.3565636 pounds/gallon for CO₂, 0.00110231 pounds/gallon for CH₄ and 0.000485016 pounds/gallon for N₂O for gasoline. Global warming potentials used to convert individual GHG emissions of CO₂, CH₄ and N₂O to carbon dioxide equivalent (CO₂e) emissions are 1, 21 and 310, respectively.

Additional cargo truck and cargo facility employee vehicle commute operations were derived for travel within the EA Socioeconomic Study Area (SSA), using roadway segment distances and total vehicle trip data derived from the traffic study completed for the EA. A traffic analysis was performed to assess the number of cargo truck and passenger vehicles trips that would result from operation of the Proposed Project, as detailed in **Appendix F** of the EA. AVMT were derived for travel between the air cargo facility and the SSA boundary, assuming that 35 percent of vehicles would use Drane Field Road and County Line Road north to Interstate 4 (I-4); 15 percent of vehicles would use Drane Field Road and County Line Road to locations south of the SSA; 25 percent of vehicles would use Drane Field Road, Airport Road north to Polk Parkway, and Polk Parkway to I-4; and 25 percent would use Drane Field Road segment speed limits, segment distances, and the percentage of traffic expected to use each road segment within the SSA. **Table 1.1.-4** details the total number of motor vehicle trips and AVMT used in the emissions analysis.

Table 1.1-3a 2019 Aircraft Fleet Mix and Activity

Aircraft Model	Fasing	2019 Existing Condition					
	Engine	Arrival	Departure	TGO*	Total		
Aerospatiale SA-350D Astar (AS-350) TPE3	TPE331-3	106	106	-	212		
Agusta A-109 250B17	250B17B	40	40	-	80		
Airbus A320-200 Series 2CM018	CFM56-5B4/2 DAC	2	2	-	4		
BEC58P	TIO-540-J2B2	5,012	5,012	1,089	11,113		
Bell 206L-4T Long Ranger 250B17	250B17B	13	13	-	26		
Boeing 727-200 Series 1PW004	JT8D-7 series Smoke Fix	1	1	-	2		
Boeing 737-800 Series 4CM039	CFM56-7B20/2	5	5	-	10		
Boeing 757-200 Series 4PW073	PW2040	2	2	-	4		
Boeing CH-46 Sea Knight T588F	T58-GE-8F	17	17	-	34		
Boeing DC-10-10 Series 3GE076	CF6-50E1 Low emissions fuel nozzle	1	1	-	2		
Boeing F/A-18 Hornet F4044	F404-GE-400	24	24	-	48		
Bombardier Challenger 600 5GE084	CF34-3B	443	443	-	886		
Bombardier Global 5000 Business 4BR009	BR700-710A2-20	69	69	-	138		
Bombardier Learjet 35 1AS002	TFE731-3	1,476	1,476	-	2,952		
CASA CN-235-100 CT79B	CT7-9B	60	60	83	203		
Cessna 150 Series O200	O-200	6,993	6,993	11,045	25,031		
Cessna 172 Skyhawk IO360	IO-360-B	493	493	-	986		
Cessna 182 IO360	IO-360-B	695	695	-	1,390		
Cessna 206 TIO540 IO-540-AC	TIO-540-J2B2	490	490	-	980		
Cessna 208 Caravan PT6A14	PT6A-114	808	808	-	1,616		
Cessna 441 Conquest II TPE10A	TPE331-10A	648	648	-	1,296		
Cessna 500 Citation I 1PW038	JT15D-5C	563	563	-	1,126		
Cessna 550 Citation II 1PW036	JT15D-4series	498	498	-	996		
Cessna 650 Citation III 1AS001	TFE731-2-2B	44	44	-	88		
Cessna 680 Citation Sovereign 7PW078	PW306B Annular	194	194	-	388		
Cessna 750 Citation X 6AL024	AE3007C1 Type 2	78	78	-	156		
COMSEP	TIO-540-J2B2	2,040	2,040	692	4,772		
DeHavilland DHC-6-100 Twin Otter PT6A20	PT6A-20	3,984	3,984	-	7,968		
Eclipse 500 / PW610F	PW610F Annular	50	50	-	100		
Embraer ERJ145 6AL008	AE3007A1/1 Type 1	1	1	-	2		
Gulfstream G400 6RR042	TAY 611-8C Transply IIJ	262	262	-	524		
Gulfstream G500 4BR003	BR700-715B1-30	69	69	-	138		
Hughes 500D 250B17	250B17B	66	66	-	132		

Phase II Air Cargo Facility Development Environmental Assessment

Aircraft Model	Engine		2019 Existin	g Condition	
	Engine	Arrival	Departure	TGO*	Total
Israel IAI-1125 Astra 1AS002	TFE731-3	76	76	-	152
Lockheed C-130 Hercules T56A14	T56-A-14	347	347	960	1,654
Lockheed P-3 Orion ANP:P3A T56A14 T56- A-14	T56-A-14	360	360	-	720
McDonnell Douglas A-4 Skyhawk J52P4	J52-P-408	30	30	-	60
Mitsubishi MU-300 Diamond 1PW037	JT15D-5, -5A, -5B	123	123	-	246
Piper PA-24 Comanche TIO540	TIO-540-J2B2	11,723	11,723	20,615	44,061
Piper PA-30 Twin Comanche IO320	IO-320-D1AD	636	636	-	1,272
Piper PA-42 Cheyenne Series PT6A41	PT6A-41	164	164	-	328
Robinson R44 Raven / Lycoming O-540-F1B5 TIO540	TIO-540-J2B2	159	159	-	318
Rockwell T-2 Buckeye J852	J85-GE-2	34	34	-	68
7Saab 340-A CT7-5	CT7-5	272	272	-	544
Sikorsky SH-60 Sea Hawk T70041	T700-GE-401 -401C	246	246	-	492
T-38 Talon J855HA	J85-GE-5H (w/AB)	40	40	-	80
	Total	39,457	39,457	34,484	113,398

Sources: AECOM, 2020; AEDT. Notes: *TGO = Touch and go operation; Values may reflect rounding.

Table 1.1-3b 2022 Aircraft Fleet Mix and Activity

Aircraft	Fraine		2022 No	Action			2022 Proposed Project				
Model	Engine	Arrival	Departure	TGO*	Total	Arrival	Departure	TGO*	Total		
1985 1-ENG COMP	TIO-540- J2B2	2,714	2,714	697	6,125	2,714	2,714	697	6,125		
Aerospatiale SA-350D Astar (AS- 350)	TPE331-3	385	385	-	770	385	385	-	770		
Agusta A-109	250B17B	144	144	-	288	144	144	-	288		
Airbus A319- 100 Series	CFM56- 5B9/2P DAC	210	210	-	420	210	210	-	420		
Airbus A320- 200 Series	CFM56- 5B4/2 DAC	90	90	-	180	90	90	-	180		
Bell 206L-4T Long Ranger	250B17B	48	48	-	96	48	48	-	96		
Boeing 737- 800 Series	CFM56- 7B20/2	373	373	-	746	373	373	-	746		
Boeing 737- 800 Series (Cargo)	CFM56- 7B20/2	2,190	2,190	-	4,380	4,928	4,928	-	9,856		
Boeing 757- 200 Series	PW2040	184	184	-	368	184	184	-	368		
Boeing 767- 300 ER Freighter	CF6- 80C2B7F	1,460	1,460	-	2,920	1,643	1,643	-	3,286		
Boeing F/A-18 Hornet	F404-GE- 400	26	26	-	52	26	26	-	52		
Bombardier Challenger 600	CF34-3B	625	625	-	1,250	625	625	-	1,250		
Bombardier Global 5000 Business	BR700- 710A2-20	97	97	-	194	97	97	-	194		
Bombardier Learjet 35	TFE731-3	2,084	2,084	-	4,168	2,084	2,084	-	4,168		

Aircraft	Enging		2022 No	Action		2022 Proposed Project				
Model	Engine	Arrival	Departure	TGO*	Total	Arrival	Departure	TGO*	Total	
CASA CN- 235-100	CT7-9B	67	67	48	182	67	67	48	182	
Cessna 150 Series	O-200	9,290	9,290	11,133	29,713	9,290	9,290	11,133	29,713	
Cessna 172 Skyhawk	IO-360-B	656	656	-	1,312	656	656	-	1,312	
Cessna 182	IO-360-B	925	925	-	1,850	925	925	-	1,850	
Cessna 206	TIO-540- J2B2	651	651	-	1,302	651	651	-	1,302	
Cessna 208 Caravan	PT6A-114	471	471	-	942	471	471	-	942	
Cessna 441 Conquest II	TPE331- 10A	377	377	1,148	1,902	377	377	1,148	1,902	
Cessna 500 Citation I	JT15D-5C	796	796	-	1,592	796	796	-	1,592	
Cessna 550 Citation II	JT15D- 4series	704	704	-	1,408	704	704	-	1,408	
Cessna 650 Citation III	TFE731-2- 2B	62	62	-	124	62	62	-	124	
Cessna 680 Citation Sovereign	PW306B Annular	274	274	-	548	274	274	-	548	
Cessna 750 Citation X	AE3007C1 Type 2	110	110	-	220	110	110	-	220	
DeHavilland DHC-6-100 Twin Otter	PT6A-20	2,320	2,320	-	4,640	2,320	2,320	-	4,640	
Eclipse 500 / PW610F	PW610F Annular	70	70	-	140	70	70	-	140	
Gulfstream G400	TAY 611- 8C Transply IIJ	369	369	-	738	369	369	-	738	
Gulfstream G500	BR700- 715B1-30	97	97	-	194	97	97	-	194	
Hughes 500D	250B17B	241	241	-	482	241	241	-	482	
Israel IAI-1125 Astra	TFE731-3	107	107	-	214	107	107	-	214	

Phase II Air Cargo Facility Development Environmental Assessment

Aircraft	Fraine		2022 No	Action			2022 Proposed Project				
Model	Engine	Arrival	Departure	TGO*	Total	Arrival	Departure	TGO*	Total		
Lockheed C- 130 Hercules	T56-A-14	381	381	556	1,318	381	381	556	1,318		
Lockheed P-3 Orion ANP:P3A	T56-A-14	396	396	-	792	396	396	-	792		
Mitsubishi MU-300 Diamond	JT15D-5, - 5A, -5B	174	174	-	348	174	174	-	348		
Piper PA-24 Comanche	TIO-540- J2B2	15,583	15,583	20,780	51,946	15,583	15,583	20,780	51,946		
Piper PA-30 Twin Comanche	IO-320- D1AD	370	370	-	740	370	370	-	740		
Piper PA-42 Cheyenne Series	PT6A-41	95	95	-	190	95	95	-	190		
Raytheon Beech Baron 58	TIO-540- J2B2	2,912	2,912	6,503	12,327	2,912	2,912	6,503	12,327		
Robinson R44 Raven / Lycoming O- 540-F1B5	TIO-540- J2B2	1,649	1,649	-	3,298	1,649	1,649	-	3,298		
Saab 340-A	CT7-5	158	158	-	316	158	158	-	316		
Sikorsky SH- 60 Sea Hawk	T700-GE- 401 -401C	692	692	-	1,384	692	692	-	1,384		
	Total	50,629	50,629	40,865	142,123	53,549	53,549	40,865	147,963		

Sources: AECOM, 2020; AEDT.

Notes: *TGO = Touch and go operation;

Values may reflect rounding.

Table 1.1-3c 2027 Aircraft Fleet Mix and Activity

Aircraft	Engine		2027 No	Action			2027 Proposed Project				
Model	•	Arrival	Departure	TGO*	Total	Arrival	Departure	TGO*	Total		
1985 1-ENG COMP	TIO-540- J2B2	3,071	3,071	893	7,035	3,071	3,071	893	7,035		
Aerospatiale SA-350D Astar (AS- 350)	TPE331-3	788	788	-	1,576	788	788	-	1,576		
Agusta A-109	250B17B	295	295	-	590	295	295	-	590		
Airbus A319- 100 Series	CFM56- 5B9/2P DAC	244	244	-	488	244	244	-	488		
Airbus A320- 200 Series	CFM56- 5B4/2 DAC	104	104	-	208	104	104	-	208		
Bell 206L-4T Long Ranger	250B17B	98	98	-	196	98	98	-	196		
Boeing 737- 800 Series	CFM56- 7B20/2	431	431	-	862	431	431	-	862		
Boeing 737- 800 Series (Cargo)	CFM56- 7B20/2	2,190	2,190	-	4,380	6,023	6,023	-	12,046		
Boeing 757- 200 Series	PW2040	212	212	-	424	212	212	-	424		
Boeing 767- 300 ER Freighter	CF6- 80C2B7F	1,460	1,460	-	2,920	2,008	2,008	-	4,015		
Boeing F/A-18 Hornet	F404-GE- 400	26	26	-	52	26	26	-	52		
Bombardier Challenger 600	CF34-3B	953	953	-	1,906	953	953	-	1,906		
Bombardier Global 5000 Business	BR700- 710A2-20	148	148	-	296	148	148	-	296		
Bombardier Learjet 35	TFE731-3	3,176	3,176	-	6,352	3,176	3,176	-	6,352		

Aircraft	Engine		2027 No	Action		2027 Proposed Project				
Model	Engine	Arrival	Departure	TGO*	Total	Arrival	Departure	TGO*	Total	
CASA CN- 235-100	CT7-9B	68	68	106	242	68	68	106	242	
Cessna 150 Series	O-200	10,526	10,526	14,271	35,323	10,526	10,526	14,271	35,323	
Cessna 172 Skyhawk	IO-360-B	742	742	-	1,484	742	742	-	1,484	
Cessna 182	IO-360-B	1,047	1,047	-	2,094	1,047	1,047	-	2,094	
Cessna 206	TIO-540- J2B2	737	737	-	1,474	737	737	-	1,474	
Cessna 208 Caravan	PT6A-114	538	538	-	1,076	538	538	-	1,076	
Cessna 441 Conquest II	TPE331- 10A	431	431	1,200	2,062	431	431	1,200	2,062	
Cessna 500 Citation I	JT15D-5C	1,212	1,212	-	2,424	1,212	1,212	-	2,424	
Cessna 550 Citation II	JT15D- 4series	1,072	1,072	-	2,144	1,072	1,072	-	2,144	
Cessna 650 Citation III	TFE731-2- 2B	94	94	-	188	94	94	-	188	
Cessna 680 Citation Sovereign	PW306B Annular	418	418	-	836	418	418	-	836	
Cessna 750 Citation X	AE3007C1 Type 2	168	168	-	336	168	168	-	336	
DeHavilland DHC-6-100 Twin Otter	PT6A-20	2,652	2,652	-	5,304	2,652	2,652	-	5,304	
Eclipse 500 / PW610F	PW610F Annular	107	107	-	214	107	107	-	214	
Gulfstream G400	TAY 611- 8C Transply IIJ	563	563	-	1,126	563	563	-	1,126	
Gulfstream G500	BR700- 715B1-30	148	148	-	296	148	148	-	296	
Hughes 500D	250B17B	492	492	-	984	492	492	-	984	
Israel IAI-1125 Astra	TFE731-3	163	163	-	326	163	163	-	326	


Phase II Air Cargo Facility Development Environmental Assessment

Aircraft	Frains		2027 No	Action		2027 Proposed Project				
Model	Engine	Arrival	Departure	TGO*	Total	Arrival	Departure	TGO*	Total	
Lockheed C- 130 Hercules	T56-A-14	388	388	1,228	2,004	388	388	1,228	2,004	
Lockheed P-3 Orion ANP:P3A	T56-A-14	403	403	-	806	403	403	-	806	
Mitsubishi MU-300 Diamond	JT15D-5, - 5A, -5B	265	265	-	530	265	265	-	530	
Piper PA-24 Comanche	TIO-540- J2B2	17,644	17,644	26,636	61,924	17,644	17,644	26,636	61,924	
Piper PA-30 Twin Comanche	IO-320- D1AD	423	423	-	846	423	423	-	846	
Piper PA-42 Cheyenne Series	PT6A-41	109	109	-	218	109	109	-	218	
Raytheon Beech Baron 58	TIO-540- J2B2	3,595	3,595	7,040	14,230	3,595	3,595	7,040	14,230	
Robinson R44 Raven / Lycoming O- 540-F1B5	TIO-540- J2B2	2,456	2,456	-	4,912	2,456	2,456	-	4,912	
Saab 340-A	CT7-5	181	181	-	362	181	181	-	362	
Sikorsky SH- 60 Sea Hawk	T700-GE- 401 -401C	803	803	-	1,606	803	803	-	1,606	
Tota	al	60,643	60,643	51,374	172,660	65,023	65,023	51,374	181,420	

Sources: AECOM, 2020; AEDT.

Notes: *TGO = Touch and go operation;

Values may reflect rounding.

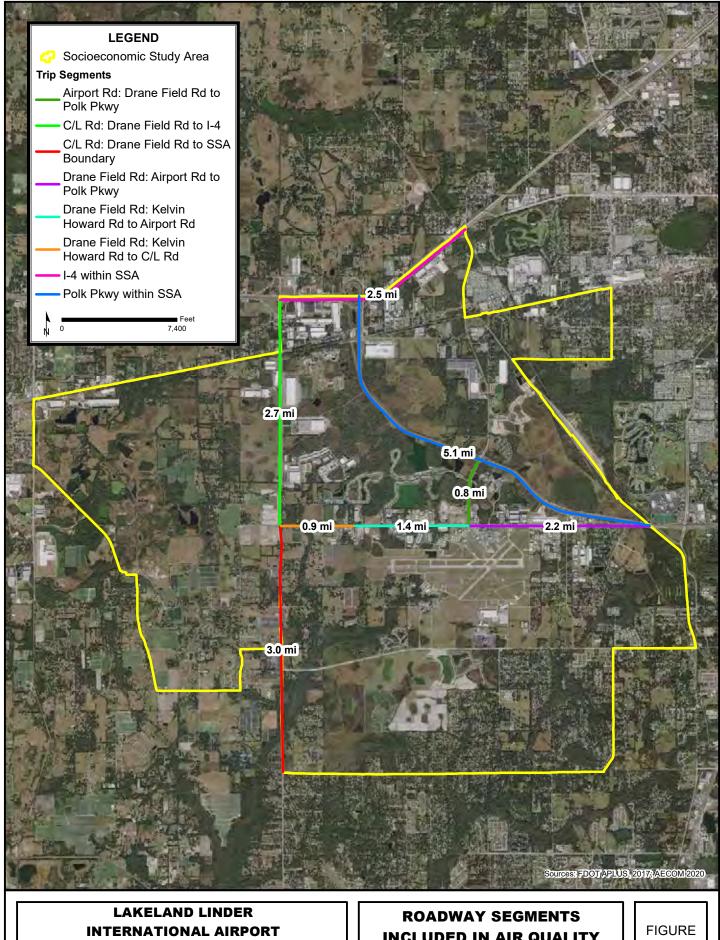

Path: C:\Users\tia.norman\Desktop\Amazon\GIS\mxd\Draft EA\Figure 1.1-1 SSA Routes_rev0.mxd, Date Saved: 10/1/2020 10:13:41 AM

PHASE II AIR CARGO DEVELOPMENT **ENVIRONMENTAL ASSESSMENT**

INCLUDED IN AIR QUALITY ANALYSIS

1.1-1

Description	2	019		
Description	Existing	Conditions		
Passenger Vehicle VMT	283,0	004,537		
Heavy Truck VMT	14,8	94,976		
Total	al 297,899,513			
	202			
Description	No-Action	Proposed Project		
Passenger Vehicle VMT	285,161,025	296,537,163		
Heavy Truck VMT	66,071,561	71,864,569		
Total	351,232,586	368,401,732		
	2	027		
Description	No-Action	Proposed Project		
Passenger Vehicle VMT	306,797,060	324,925,101		
Heavy Truck VMT	75,866,582	89,252,580		
Total	382,663,642	414,177,681		

Table 1.1-4 Estimated Annual Motor Vehicle Operations Activity

Sources: AECOM, 2020

Note: 2022 and 2027 No-Action includes traffic increases resulting from Phase I Cargo Facility Development

Emission rates, (including vehicle age distributions, inspection and maintenance programs, to the extent applied, fuel supply and other data) for cargo trucks and employee vehicles were derived using MOVES, as described in **Section 1.1.1** above. Cargo trucks were assumed to be single utility short-haul diesel trucks. Private passenger vehicles, including employee vehicles, were assumed to be gasoline passenger cars. Emission rates used for the analysis of motor vehicle emissions are shown in **Table 1.1-5**.

Vehicle		Average	2019 Emission Rates (Grams per VMT)								
Туре	Fuel Type	Speed (mph)	со	NOx	PM 10	PM _{2.5}	SO ₂	voc	CO ₂ e		
Cargo Trucks	Diesel	60	1.460	2.827	0.210	0.270	0.007	0.431	782.731		
Passenger Vehicles	Gasoline	60	3.458	0.247	0.005	0.016	0.006	0.177	303.303		
Vehicle		Average		2022	Emissio	n Rates (Grams p	er VMT)			
Туре	Fuel Type	Speed (mph)	со	NOx	PM 10	PM _{2.5}	SO ₂	voc	CO ₂ e		
Cargo Trucks	Diesel	60	1.124	2.053	0.148	0.203	0.007	0.312	775.843		
Passenger Vehicles	Gasoline	60	2.971	0.175	0.005	0.016	0.006	0.142	281.268		
Vehicle		Average	2027 Emission Rates (Grams per VMT)								
Туре	Fuel Type	Speed (mph)	со	NOx	PM ₁₀	PM _{2.5}	SO ₂	voc	CO ₂ e		
Cargo Trucks	Diesel	60	0.672	1.307	0.082	0.131	0.006	0.167	759.664		
Passenger Vehicles	Gasoline	60	2.311	0.102	0.005	0.015	0.005	0.108	239.603		
Source: EPA M	OVES2014b										

Table 1.1-5 On-road Vehicle Emission Rates

Operations emissions for cargo truck and passenger vehicle traffic were further refined to account for increased idling emissions resulting from potential intersection delays associated with the Proposed Project. As discussed in the EA, a traffic analysis was conducted for the Proposed Project, in which estimated significant delays could result at the intersection of Kidron Road and Drane Field Road. Two traffic mitigation options are presented in the EA for this intersection: 1) add dedicated turning lanes at the intersection and retain the existing stop sign, and 2) add dedicated turn lanes and replace the existing stop sign with a traffic signal. Idle times were calculated for the Proposed Project without intersection delay mitigation, and with each of the proposed mitigation strategies, as described in **Appendix F** of the EA. Idle emissions were calculated for each study year using average idle times for the No-Action Alternative and for the Proposed Project with no traffic mitigation, with mitigation option 1, and with mitigation option 2, using **Equation 5**. Idle emission rates derived from MOVES2014b are presented in **Table 1.1-6**. Total passenger vehicle and cargo truck emissions presented in the EA include in-transit emissions and idle emissions at this intersection, for each scenario described above.

Equation 5:

 $Emissions_{(tpy)} = \sum_{v=i}^{n} EF_{v} \times \frac{hours}{trip} \times \frac{trips}{year} \div 2,000 \div 453.59$

Where:

Emissions_(tpy)= annual emissions (tons per year) EF_v= emissions rate for vehicle type v(i)...v(n) (grams per hour of idling) 2,000 = pounds per ton 453.59 = grams per pound

Fuel	2019 Emission Rates (Grams per Idle Hour)									
Туре	CO	NOx	PM 10	PM _{2.5}	SO ₂	VOC	CO ₂ e			
Diesel	12.421	29.406	2.801	3.044	0.057	6.345	6,673.072			
Gasoline	7.362	1.970	0.045	0.051	0.070	1.406	3,551.162			
Fuel		2022 E	mission R	ates (Gra	ims per ld	lle Hour)				
Туре	CO	NOx	PM ₁₀	PM _{2.5}	SO ₂	VOC	CO ₂ e			
Diesel	9.929	19.971	2.097	2.279	0.056	4.537	6,595.336			
Gasoline	4.534	1.151	0.042	0.047	0.064	1.068	3,268.623			
Fuel		2027 E	mission R	ates (Gra	ims per ld	lle Hour)				
Туре	СО	NOx	PM 10	PM _{2.5}	SO ₂	VOC	CO ₂ e			
Diesel	6.047	12.232	1.127	1.225	0.054	2.423	6,457.424			
Gasoline	1.709	0.478	0.037	0.042	0.055	0.797	2,774.403			
	Type Diesel Gasoline Fuel Type Diesel Gasoline Fuel Type Diesel	TypeCODiesel12.421Gasoline7.362Fuel TypeCODiesel9.929Gasoline4.534Fuel TypeCODiesel6.047	Type CO NOx Diesel 12.421 29.406 Gasoline 7.362 1.970 Fuel 2022 E Type CO NOx Diesel 9.929 19.971 Gasoline 4.534 1.151 Fuel 2027 E Type CO NOx Diesel 6.047 12.232	Type CO NOx PM10 Diesel 12.421 29.406 2.801 Gasoline 7.362 1.970 0.045 Fuel 2022 Emission R Type CO NOx PM10 Diesel 9.929 19.971 2.097 Gasoline 4.534 1.151 0.042 Fuel 2027 Emission R Type CO NOx PM10 Diesel 9.929 19.971 2.097 Gasoline 4.534 1.151 0.042 Fuel 2027 Emission R Type CO NOx PM10 Diesel 6.047 12.232 1.127	Type CO NOx PM10 PM2.5 Diesel 12.421 29.406 2.801 3.044 Gasoline 7.362 1.970 0.045 0.051 Fuel 2022 Emission Rates (Gra Type CO NOx PM10 PM2.5 Diesel 9.929 19.971 2.097 2.279 Gasoline 4.534 1.151 0.042 0.047 Fuel 2027 Emission Rates (Gra 0.047 Fuel 2027 Emission Rates (Gra 0.047 Diesel 6.047 12.232 1.127 1.225	Type CO NOx PM10 PM2.5 SO2 Diesel 12.421 29.406 2.801 3.044 0.057 Gasoline 7.362 1.970 0.045 0.051 0.070 Fuel 2022 Emission Rates (Grams per loc SO2 SO2 SO3 SO3 Diesel 9.929 19.971 2.097 2.279 0.056 Gasoline 4.534 1.151 0.042 0.047 0.064 Fuel 2027 Emission Rates (Grams per loc 0.047 0.064 Fuel 2027 Emission Rates (Grams per loc 0.047 0.064 Fuel 2027 Emission Rates (Grams per loc 0.047 0.064 Fuel 2027 Emission Rates (Grams per loc 0.047 0.064 Type CO NOx PM10 PM2.5 SO2 Diesel 6.047 12.232 1.127 1.225 0.054	Type CO NOx PM10 PM2.5 SO2 VOC Diesel 12.421 29.406 2.801 3.044 0.057 6.345 Gasoline 7.362 1.970 0.045 0.051 0.070 1.406 Fuel 2022 Emission Rates (Grams per Idle Hour) PM10 PM2.5 SO2 VOC Diesel 9.929 19.971 2.097 2.279 0.056 4.537 Gasoline 4.534 1.151 0.042 0.047 0.064 1.068 Fuel 2027 Emission Rates (Grams per Idle Hour) PM2.5 SO2 VOC Diesel 6.047 12.232 1.127 1.225 0.054 2.423			

Source: EPA MOVES2014b